

URMIII —SERIES—

Ease of Use



Creative Installation



Compatible PSU Box




Bottom Protection



Modular Design



APPLICATIONS

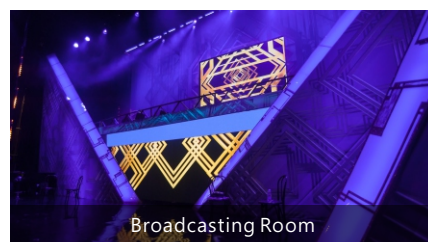


Broadcasting Room



Concert & Live Event



Corporate & Conference

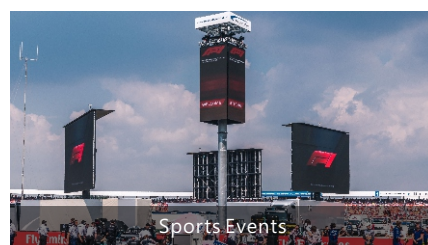

Sports Events

FEATURES

- True single-person installation – automatic lock design, excellent safety performance
- Pinch n' go module – high efficiency of screen maintenance
- 3D corner protection – protect the screen from damage
- Creative installation – 90° corner, curve and creative shapes



SPECIFICATIONS

Parameter	Value				
Model	URMIII2.6	URMIII2	URMIII3	URMIII03	URMIII04
Pixel Pitch	2.6mm	2.9mm	3.9mm	3.9mm	4.8mm
Environment	Indoor	Indoor	Indoor	Outdoor	Outdoor
LED Type	3-in-1 Black SMD	3-in-1 Black SMD	3-in-1 Black SMD	3-in-1 SMD	3-in-1 SMD
Brightness	800 cd/m ²	800 cd/m ²	800 cd/m ²	4,500 cd/m ²	4,500 cd/m ²
Pixel Density	147,456 pixels/m ²	112,896 pixels/m ²	65,536 pixels/m ²	65,536 pixels/m ²	43,264 pixels/m ²
Module Size (W×H)	250mm × 250mm	250mm × 250mm	250mm × 250mm	250mm × 250mm	250mm × 250mm
Panel Size (W×H×D)	500mm × 500mm × 83mm	500mm × 500mm × 83mm	500mm × 500mm × 83mm	500mm × 500mm × 83mm	500mm × 500mm × 83mm
	500mm × 1,000mm × 83mm	500mm × 1,000mm × 83mm	500mm × 1,000mm × 83mm	500mm × 1,000mm × 83mm	500mm × 1,000mm × 83mm
Panel Resolution	192 × 192 dots	168 × 168 dots	128 × 128 dots	128 × 128 dots	104 × 104 dots
	192 × 384 dots	168 × 336 dots	128 × 256 dots	128 × 256 dots	104 × 208 dots
Panel Weight	7.9 kg	7.9 kg	7.9 kg	8.5 kg	8.5 kg
	13 kg	13 kg	13 kg	13.9 kg	13.9 kg
Material	Die-cast Aluminum	Die-cast Aluminum	Die-cast Aluminum	Die-cast Aluminum	Die-cast Aluminum
Ingress Protection	IP30	IP30	IP30	IP65	IP65
Operating Temperature/Humidity	-10°C to 45°C/10% - 80% RH	-10°C to 45°C/10% - 80% RH	-10°C to 45°C/10% - 80% RH	-20°C to 50°C/10% - 90% RH	-20°C to 50°C/10% - 90% RH
Maintenance	Rear	Rear	Rear	Rear	Rear
Curve (Convex - Concave)	-10° to 10°	-10° to 10°	-10° to 10°	-10° to 10°	-10° to 10°
Viewing Angle (H/V)	140°/120°	140°/120°	140°/120°	140°/120°	140°/120°
Contrast Ratio	3,000:1	3,000:1	3,000:1	3,000:1	3,000:1
Input Power/Panel (Max.)	120 W	120 W	120 W	170 W	170 W
	240 W	240 W	240 W	335W	335W
Input Power/Panel (Ave.)	35 W	35 W	35 W	50 W	50 W
	70 W	70 W	70 W	100 W	100 W
Refresh Rate	3,840 Hz	2,880 Hz	3,840 Hz	3,840 Hz	3,840 Hz
Input Voltage	100 - 240 VAC	100 - 240 VAC	100 - 240 VAC	100 - 240 VAC	100 - 240 VAC
Input Power Frequency	50 - 60 Hz	50 - 60 Hz	50 - 60 Hz	50 - 60 Hz	50 - 60 Hz
Standard Mounting Configuration	Hanging, Stacking	Hanging, Stacking	Hanging, Stacking	Hanging, Stacking	Hanging, Stacking

Note: Specifications are for reference only and are subject to change without notice.

DIMENSIONS

