

*Professional
Fluid Heads &
Tripod Systems*



V-Series



Index

TRIPOD SYSTEMS

Payload max. 10kg Bowl 75mm

DV6P GS CF	4
DV6P GS AL	4
DV6P MS CF	5
DV6P MS AL	5

Payload max. 12kg Bowl 100mm

V10 GS CF	6
V10 GS AL	6
V10 MS CF	7
V10 MS AL	7

Payload max. 14kg Bowl 100mm

V12 GS CF	8
V12 GS AL	8
V12 MS CF	9
V12 MS AL	9

Payload max. 20kg Bowl 100mm

V15P GS CF	10
V15P GS AL	10
V15P MS CF	11
V15P MS AL	11

Payload max. 25kg Bowl 100mm

V20S GS CF	12
V20S GS AL	12
V20S MS CF	13
V20S MS AL	13
V20P EFP GS CF	15
V20P EFP MS CF	15

Payload max. 32kg Bowl 100mm

V25P EFP GS CF	17
V25P EFP MS CF	17

Payload max. 45kg Bowl 150mm

V35P EFP GS CF	19
V35P EFP MS CF	19

Bowl 150mm + Flat Base

CINE30 CINE GS AL	23
CINE30 EFP GS CF	23
CINE30 EFP MS CF	23

Payload max. 60kg 4-Bolt Flat Base

V60 Studio/OB MS AL	25
---------------------	----

Payload max. 70kg 4-Bolt Flat Base

V60S EFP MS AL	27
----------------	----

Payload max. 90kg 4-Bolt Flat Base

V90 Studio/OB MS AL	29
---------------------	----

ACCESSORIES

Ground Spreaders	30
Dollies	30
Mid Level Spreaders & Rubber Feet	31
Pan Bars	31
Wedge Plates & V-Plates	32
Adapter Plates	33
Bowl Clamps & Mitchell Adapters	33
Hard Cases	34
Recommended Products	35



The Camgear V-Series tripod systems support cameras from DSLR to large Cine or OB set-ups. This wide range offers an array of choices regarding weight, material, payload and technical specifications. Whether you are using it for news gathering or field production, studio work in any shape or size, film making or lowbudget video productions, the V-Series always provides a frictionless, stable and reliable performance. All Camgear fluid heads are equipped with a graded drag system and a counterbalance system which ensures fast camera set-up and easy operation.



Photo by Bart Kester


Camgear DV6P **Payload 10kg Bowl 75mm**



Specifications

Model Number	DV6P
Maximum Payload	10 kg/22 lbs
Counterbalance Range	0-9 kg/0-19.8 lbs (at C.O.G 50 mm)
Camera Platform Type	Mini Euro plate (Camgear WP-2)
Sliding Range	60 mm/2.36 in
Camera Plate	1/4" screw & pin
Counterbalance System	8 steps (1-8)
Pan & Tilt Drag	4 steps (1-4)
Pan & Tilt Range	Pan: 360° / Tilt: +90°/-75°
Temperature Range	-40°C to +60°C / -40 to +140°F
Levelling Bubble	Yes
Weight	2.2 kg/4.85 lbs
Bowl Diameter	75 mm

- ◆ Real professional drag performance, selectable 4 positions pan & tilt drag including zero position, offer operators silky smooth movement and precise framing and ensure fast change of drag.
- ◆ Selectable 8 position counterbalance system including zero position gives the operator much fine adjustment for the cameras.
- ◆ With levelling bubble.
- ◆ Ideal for DSLR configuration and lightweight camcorders.
- ◆ 75 mm ball levelling.
- ◆ Equipped with mini Euro plate quick-release system, which enables faster set-up of camera.



Camgear DV6P **GS CF Bowl 75mm**

Tripod System incl. DV6P Fluid Head, Carbon Fiber Tripod & Ground Spreader.

SKU: CMG-DV6P-GS-CF-TRISYS

System Configuration

- DV6P Fluid Head
- T75/CF2 2-Stage Carbon Fiber Tripod
- PB-1 Pan Bar
- GS-2 Ground Spreader
- Tripod Bag



Weight	5.90 kg/13.0 lbs
Height Range	0.55-1.64 m/21.7-64.6 in
Transport Length	0.85 m/33.5 in
Section	2 Stages

Camgear DV6P **GS AL Bowl 75mm**

Tripod System incl. DV6P Fluid Head, Aluminum Tripod & Ground Spreader.

SKU: CMG-DV6P-GS-AL-TRISYS

System Configuration

- DV6P Fluid Head
- T75/AL2 2-Stage Aluminum Tripod
- PB-1 Pan Bar
- GS-2 Ground Spreader
- Tripod Bag



Weight	6.72 kg/14.8 lbs
Height Range	0.55-1.64 m/21.7-64.6 in
Transport Length	0.85 m/33.5 in
Section	2 Stages

Camgear DV6P **MS CF Bowl 75mm**

Tripod System incl. DV6P Fluid Head, Carbon Fiber Tripod & Mid Level Spreader.

SKU: CMG-DV6P-MS-CF-TRISYS

System Configuration

- DV6P Fluid Head
- T75/CF2 2-Stage Carbon Fiber Tripod
- PB-1 Pan Bar
- MSP-2 Mid Level Spreader
- RF-1 Rubber Feet (x3)
- Tripod Bag



Weight	6.34 kg/14.0 lbs
Height Range	0.64-1.64 m/25.2-64.6 in
Transport Length	0.85 m/33.5 in
Section	2 Stages

Camgear DV6P **MS AL Bowl 75mm**

Tripod System incl. DV6P Fluid Head, Aluminum Tripod & Mid Level Spreader.

SKU: CMG-DV6P-MS-AL-TRISYS

System Configuration

- DV6P Fluid Head
- T75/AL2 2-Stage Aluminum Tripod
- PB-1 Pan Bar
- MSP-2 Mid Level Spreader
- RF-1 Rubber Feet (x3)
- Tripod Bag



Weight	7.16 kg/15.8 lbs
Height Range	0.64-1.64 m/25.2-64.6 in
Transport Length	0.85 m/33.5 in
Section	2 Stages


Camgear V10 **Payload 12KG** **Bowl 100MM**



Specifications

Model Number	V10
Maximum Payload	12 kg/26.4 lbs
Counterbalance Range	0-11 kg/0-24.2 lbs (at C.O.G 100 mm)
Camera Platform Type	Mini Euro plate (Camgear WP-1)
Sliding Range	60 mm/2.36 in
Camera Plate	1/4", 3/8" screw & pin
Counterbalance System	6 steps (1-6)
Pan & Tilt Drag	4 steps (0+3)
Pan & Tilt Range	Pan: 360° / Tilt: +90/-75°
Temperature Range	-40°C to +60°C / -40 to +140°F
Levelling Bubble	Yes
Weight	2.5 kg/5.5 lbs
Bowl Diameter	100 mm

- ◆ Real professional drag performance, selectable 4 positions pan & tilt drag including zero position, offer operators silky smooth movement and precise framing.
- ◆ Selectable 6 position counterbalance system including zero position for cameras up to 12 kg/26.4 lbs.
- ◆ With levelling bubble.
- ◆ Thanks to zero position, the head is able to support small DSLR configuration and fully configured HDV cameras and cameras with light ENG configuration.
- ◆ 100 mm ball levelling.
- ◆ Equipped with mini Euro plate quick-release system, which enables faster set-up of camera.



Camgear V10 **GS CF** **Bowl 100MM**

Tripod System incl. V10 Fluid Head, Carbon Fiber Tripod & Ground Spreader.

SKU: CMG-V10-GS-CF-TRISYS

System Configuration

- V10 Fluid Head
- T100/CF2 2-Stage Carbon Fiber Tripod
- PB-1 Pan Bar
- GS-2 Ground Spreader
- Tripod Bag



Weight	6.22 kg/13.7 lbs
Height Range	0.56-1.65 m/21.7-64.6 in
Transport Length	0.86 m/33.9 in
Section	2 Stages

Camgear V10 **GS AL** **Bowl 100MM**

Tripod System incl. V10 Fluid Head, Aluminum Tripod & Ground Spreader.

SKU: CMG-V10-GS-AL-TRISYS

System Configuration

- V10 Fluid Head
- T100/AL2 2-Stage Aluminum Tripod
- PB-1 Pan Bar
- GS-2 Ground Spreader
- Tripod Bag



Weight	7.04 kg/15.5 lbs
Height Range	0.56-1.65 m/21.7-64.6 in
Transport Length	0.86 m/33.9 in
Section	2 Stages

Camgear V10 **MS CF** **Bowl 100MM**

Tripod System incl. V10 Fluid Head, Carbon Fiber Tripod & Mid Level Spreader.

SKU: CMG-V10-MS-CF-TRISYS

System Configuration

- V10 Fluid Head
- T100/CF2 2-Stage Carbon Fiber Tripod
- PB-1 Pan Bar
- MSP-2 Mid Level Spreader
- RF-1 Rubber Feet (x3)
- Tripod Bag



Weight	6.66 kg/14.7 lbs
Height Range	0.65-1.65 m/25.6-65.0 in
Transport Length	0.86 m/33.9 in
Section	2 Stages

Camgear V10 **MS AL** **Bowl 100MM**

Tripod System incl. V10 Fluid Head, Aluminum Tripod & Mid Level Spreader.

SKU: CMG-V10-MS-AL-TRISYS

System Configuration

- V10 Fluid Head
- T100/AL2 2-Stage Aluminum Tripod
- PB-1 Pan Bar
- MSP-2 Mid Level Spreader
- RF-1 Rubber Feet (x3)
- Tripod Bag



Weight	7.48 kg/16.5 lbs
Height Range	0.65-1.65 m/25.6-65.0 in
Transport Length	0.86 m/33.9 in
Section	2 Stages


Camgear V12 **Payload 14KG** **Bowl 100MM**



Specifications

Model Number	V12
Maximum Payload	14 kg/30.8 lbs
Counterbalance Range	0-12 kg/0-28.6 lbs (at C.O.G 125 mm)
Camera Platform Type	Mini Euro plate (Camgear WP-3)
Sliding Range	70 mm/2.75 in
Camera Plate	1/4", 3/8" screw
Counterbalance System	8 steps (1-8)
Pan & Tilt Drag	6 steps (1-6)
Pan & Tilt Range	Pan: 360° / Tilt: +90/-75°
Temperature Range	-40°C to +60°C / -40 to +140°F
Levelling Bubble	Illuminated Levelling Bubble
Weight	3.0 kg/6.6 lbs
Bowl Diameter	100 mm

- ◆ Real professional drag performance, selectable 4 positions pan & tilt drag including zero position, offer operators silky smooth movement and precise framing.
- ◆ Selectable 8 position counterbalance system including zero position gives the operator much fine adjustment for the cameras.
- ◆ With self-illuminating levelling bubble.
- ◆ Thanks to the low minimum payload, the head is able to support handheld cameras.
- ◆ Equipped with mini Euro plate quick-release system, which enables faster set-up of camera.



Camgear V12 **GS CF** **Bowl 100MM**

Tripod System incl. V12 Fluid Head, Carbon Fiber Tripod & Ground Spreader.
 SKU: CMG-V12-GS-CF-TRISYS

System Configuration

- V12 Fluid Head
- ENG/CF2 2-Stage
- Carbon Fiber Tripod
- PB-1 Pan Bar
- GS-2 Ground Spreader
- Tripod Bag



Weight	7.15 kg/15.7 lbs
Height Range	0.61-1.70 m/24.0-66.9 in
Transport Length	0.88 m/34.6 in
Section	2 Stages

Camgear V12 **GS AL** **Bowl 100MM**

Tripod System incl. V12 Fluid Head, Aluminum Tripod & Ground Spreader.
 SKU: CMG-V12-GS-AL-TRISYS

System Configuration

- V12 Fluid Head
- ENG/AL2 2-Stage
- Aluminum Tripod
- PB-1 Pan Bar
- GS-2 Ground Spreader
- Tripod Bag



Weight	8.0 kg/17.6 lbs
Height Range	0.61-1.70 m/24.0-66.9 in
Transport Length	0.88 m/34.6 in
Section	2 Stages

Camgear V12 **MS CF** **Bowl 100MM**

Tripod System incl. V12 Fluid Head, Carbon Fiber Tripod & Mid Level Spreader.
 SKU: CMG-V12-MS-CF-TRISYS

System Configuration

- V12 Fluid Head
- ENG/CF2 2-Stage
- Carbon Fiber Tripod
- PB-1 Pan Bar
- MSP-2 Mid Level Spreader
- RF-1 Rubber Feet (x3)
- Tripod Bag



Weight	8.04 kg/17.7 lbs
Height Range	0.69-1.66 m/27.2-65.4 in
Transport Length	0.88 m/34.6 in
Section	2 Stages

Camgear V12 **MS AL** **Bowl 100MM**

Tripod System incl. V12 Fluid Head, Aluminum Tripod & Mid Level Spreader.
 SKU: CMG-V12-MS-AL-TRISYS

System Configuration

- V12 Fluid Head
- ENG/AL2 2-Stage
- Aluminum Tripod
- PB-1 Pan Bar
- MSP-2 Mid Level Spreader
- RF-1 Rubber Feet (x3)
- Tripod Bag



Weight	8.44 kg/18.6 lbs
Height Range	0.69-1.66 m/27.2-65.4 in
Transport Length	0.88 m/34.6 in
Section	2 Stages


Camgear V15P **Payload 20KG Bowl 100MM**



Specifications

Model Number	V15P
Maximum Payload	20 kg/44 lbs
Counterbalance Range	0-18 kg/0-39.7 lbs (at C.O.G 125 mm)
Camera Platform Type	Mini Euro plate (Camgear WP-3)
Sliding Range	70 mm/2.75 inw
Camera Plate	1/4", 3/8" screw
Counterbalance System	9 steps (1-8 & 1 adjusting lever)
Pan & Tilt Drag	6 steps (1-6)
Pan & Tilt Range	Pan: 360° / Tilt: +90/-75°
Temperature Range	-40°C to +60°C / -40 to +140°F
Levelling Bubble	Illuminated Levelling Bubble
Weight	3.2 kg/7.0 lbs
Bowl Diameter	100 mm

- ◆ Real professional drag performance, selectable 6 positions pan & tilt drag including zero position, offer operators silky smooth movement and precise framing.
- ◆ Selectable 9 position counterbalance for ENG cameras. Thanks to newly featured zero position, it can support the lightweight ENG camera as well.
- ◆ With self-illuminating levelling bubble.
- ◆ Ideal for the ENG cameras from XDCAM to P2HD with low or high profile configuration.
- ◆ 100 mm bowl head, compatible with all 100 mm tripods on the market.
- ◆ Equipped with mini Euro plate quick-release system, which enables faster set-up of camera.

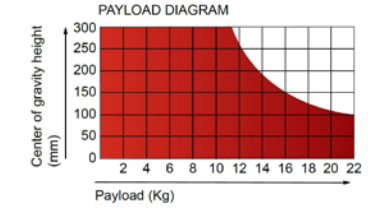

Camgear V15P **GS CF Bowl 100MM**

Tripod System incl. V15P Fluid Head, Carbon Fiber Tripod & Ground Spreader.
 SKU: CMG-V15P-GS-CF-TRISYS

System Configuration

- V15P Fluid Head
- ENG/CF2 2-Stage Carbon Fiber Tripod
- PB-1 Pan Bar
- GS-2 Ground Spreader
- Tripod Bag



Weight	7.21 kg/15.9 lbs
Height Range	0.61-1.70 m/24.0-66.9 in
Transport Length	0.88 m/34.6 in
Section	2 Stages

Camgear V15P **GS AL Bowl 100MM**

Tripod System incl. V15P Fluid Head, Aluminum Tripod & Ground Spreader.
 SKU: CMG-V15P-GS-AL-TRISYS

System Configuration

- V15P Fluid Head
- ENG/AL2 2-Stage Aluminum Tripod
- PB-1 Pan Bar
- GS-2 Ground Spreader
- Tripod Bag



Weight	8.06 kg/17.8 lbs
Height Range	0.61-1.70 m/24.0-66.9 in
Transport Length	0.88 m/34.6 in
Section	2 Stages

Camgear V15P **MS CF Bowl 100MM**

Tripod System incl. V15P Fluid Head, Carbon Fiber Tripod & Mid Level Spreader.
 SKU: CMG-V15P-MS-CF-TRISYS

System Configuration

- V15P Fluid Head
- ENG/CF2 2-Stage Carbon Fiber Tripod
- PB-1 Pan Bar
- MSP-2 Mid Level Spreader
- RF-1 Rubber Feet (x3)
- Tripod Bag



Weight	7.65 kg/16.9 lbs
Height Range	0.69-1.66 m/27.2-65.4 in
Transport Length	0.88 m/34.6 in
Section	2 Stages

Camgear V15P **MS AL Bowl 100MM**

Tripod System incl. V15P Fluid Head, Aluminum Tripod & Mid Level Spreader.
 SKU: CMG-V15P-MS-AL-TRISYS

System Configuration

- V15P Fluid Head
- ENG/AL2 2-Stage Aluminum Tripod
- PB-1 Pan Bar
- MSP-2 Mid Level Spreader
- RF-1 Rubber Feet (x3)
- Tripod Bag



Weight	8.5 kg/18.7 lbs
Height Range	0.69-1.66 m/27.2-65.4 in
Transport Length	0.88 m/34.6 in
Section	2 Stages


Camgear V20S **Payload 25KG Bowl 100MM**



Specifications

Model Number	V20S
Maximum Payload	25 kg/55.1 lbs
Counterbalance Range	0-24 kg/0-52.9 lbs (at C.O.G 125 mm)
Camera Platform Type	Mini Euro plate (Camgear WP-3)
Sliding Range	70 mm/2.75 in
Camera Plate	1/4", 3/8" screw
Counterbalance System	10 steps (1-8 & 2 Adjusting levers)
Pan & Tilt Drag	8 steps (1-8)
Pan & Tilt Range	Pan: 360° / Tilt: +90/-75°
Temperature Range	-40°C to +60°C / -40 to +140°F
Levelling Bubble	Illuminated Levelling Bubble
Weight	3.2 kg/7.0 lbs
Bowl Diameter	100 mm

- ◆ Real professional drag performance, selectable 8 positions pan & tilt drag including zero position, offer operators silky smooth movement and precise framing.
- ◆ Selectable 10 position counterbalance for ENG cameras. Thanks to newly featured zero position, it can support the lightweight ENG camera as well.
- ◆ With self-illuminating levelling bubble.
- ◆ Ideal for the ENG cameras from XDCAM to P2HD with low or high profile configuration.
- ◆ 100mm bowl head, compatible with all 100 mm tripods on the market.
- ◆ Equipped with mini Euro plate quick-release system, which enables faster set-up of camera.



Camgear V20S **GS CF Bowl 100MM**

Tripod System incl. V20S Fluid Head, Carbon Fiber Tripod & Ground Spreader.

SKU: CMG-V20S-GS-CF-TRISYS

System Configuration

- V20S Fluid Head
- ENG/CF2 2-Stage Carbon Fiber Tripod
- PB-1 Pan Bar
- GS-2 Ground Spreader
- Tripod Bag



Weight	7.75 kg/17.1 lbs
Height Range	0.61-1.70 m/24.0-66.9 in
Transport Length	0.88 m/34.6 in
Section	2 Stages

Camgear V20S **GS AL Bowl 100MM**

Tripod System incl. V20S Fluid Head, Aluminum Tripod & Ground Spreader.

SKU: CMG-V20S-GS-AL-TRISYS

System Configuration

- V20S Fluid Head
- ENG/AL2 2-Stage Aluminum Tripod
- PB-1 Pan Bar
- GS-2 Ground Spreader
- Tripod Bag



Weight	8.6 kg/18.9 lbs
Height Range	0.61-1.70 m/24.0-66.9 in
Transport Length	0.88 m/34.6 in
Section	2 Stages

Camgear V20S **MS CF Bowl 100MM**

Tripod System incl. V20S Fluid Head, Carbon Fiber Tripod & Mid Level Spreader.

SKU: CMG-V20S-MS-CF-TRISYS

System Configuration

- V20S Fluid Head
- ENG/CF2 2-Stage Carbon Fiber Tripod
- PB-1 Pan Bar
- MSP-2 Mid Level Spreader
- RF-1 Rubber Feet (x3)
- Tripod Bag



Weight	8.19 kg/18.1 lbs
Height Range	0.69-1.66 m/27.2-65.4 in
Transport Length	0.88 m/34.6 in
Section	2 Stages

Camgear V20S **MS AL Bowl 100MM**

Tripod System incl. V20S Fluid Head, Aluminum Tripod & Mid Level Spreader.

SKU: CMG-V20S-MS-AL-TRISYS

System Configuration

- V20S Fluid Head
- ENG/AL2 2-Stage Aluminum Tripod
- PB-1 Pan Bar
- MSP-2 Mid Level Spreader
- RF-1 Rubber Feet (x3)
- Tripod Bag



Weight	9.04 kg/19.9 lbs
Height Range	0.69-1.66 m/27.2-65.4 in
Transport Length	0.88 m/34.6 in
Section	2 Stages


Camgear V20P EFP **Payload 25KG Bowl 100MM**



Specifications

Model Number	V20P
Maximum Payload	25 kg/55.1 lbs
Counterbalance Range	0-24 kg/0-52.9 lbs (at C.O.G 125 mm)
Camera Platform Type	Mini Euro plate (Camgear WP-4)
Sliding Range	120 mm/4.72 in
Camera Plate	1/4", 3/8" screw
Counterbalance System	9 steps (1-8 & 2 Adjusting levers)
Pan & Tilt Drag	8 steps (1-8)
Pan & Tilt Range	Pan: 360° / Tilt: +90/-75°
Temperature Range	-40°C to +60°C / -40 to +140°F
Levelling Bubble	Illuminated Levelling Bubble
Weight	4.78 kg/10.5 lbs
Bowl Diameter	100 mm

- ◆ Real professional drag performance, selectable 8 positions pan & tilt drag including zero position, offer operators silky smooth movement and precise motion tracking.
- ◆ Selectable 9 position counterbalance for ENG cameras. Thanks to zero position, it can support the lightweight ENG camera and offer fine adjustment to reach the perfect balance.
- ◆ With self-illuminating levelling bubble.
- ◆ Perfect solution for ENG/EFP and field-based HD production and small studio configuration and it supports most portable broadcast cameras and camcorders.
- ◆ Equipped with mini Euro plate quick-release system, which enables faster set-up of camera.



Camgear V20P EFP **GS CF Bowl 100MM** | **MS CF Bowl 100MM**

Tripod System incl. V20P Fluid Head, Carbon Fiber Tripod & Ground Spreader.

SKU: CMG-V20P-GS-CF-TRISYS

Tripod System incl. V20P EFP Fluid Head, Carbon Fiber Tripod & Mid Level Spreader.

SKU: CMG-V20P-MS-CF-TRISYS



System Configuration

- V20P Fluid Head
- EFP100/CF2 2-Stage Carbon Fiber Heavy-Duty EFP Tripod
- GS-2 Ground Spreader
- 2 PB-2 Telescopic Pan Bars (Left & Right)
- Tripod Bag

Weight	10.68 kg/23.5 lbs
Maximum Height	1.78 m/70.1 in
Minimum Height	0.73 m/28.7 in
Transport Length	0.96 m/37.8 in
Section	2 Stages



System Configuration

- V20P Fluid Head
- EFP100/CF2 2-Stage Carbon Fiber Heavy-Duty EFP Tripod
- MSP-2 Mid Level Spreader
- RF-1 Rubber Feet (x3)
- 2 PB-2 Telescopic Pan Bars (Left & Right)
- Tripod Bag

Weight	11.12 kg/24.5 lbs
Maximum Height	1.73 m/68.1 in
Minimum Height	0.76 m/29.9 in
Transport Length	0.96 m/37.8 in
Section	2 Stages


Camgear V25P EFP **Payload 32KG Bowl 100MM**



Specifications

Model Number	V25P
Maximum Payload	32 kg/70.5 lbs
Counterbalance Range	0-29 kg/0-63.9 lbs (at C.O.G 125 mm)
Camera Platform Type	Mini Euro plate (Camgear WP-4)
Sliding Range	120 mm/4.72 in
Camera Plate	1/4", 3/8" screw
Counterbalance System	10 steps (1-8 & 2 Adjusting levers)
Pan & Tilt Drag	8 steps (1-8)
Pan & Tilt Range	Pan: 360° / Tilt: +90/-75°
Temperature Range	-40°C to +60°C / -40 to +140°F
Levelling Bubble	Illuminated Levelling Bubble
Weight	5.6 kg/12.3 lbs
Bowl Diameter	100 mm

- ◆ Selectable 8 steps pan & tilt drag including zero position offer operators silky smooth movement and precise motion tracking.
- ◆ Selectable 10 position counterbalance, thanks to newly added lever adjusting position, it can support the lightweight ENG camera and offer more fine adjustment for the cameras to reach the perfect balance.
- ◆ Perfect solution for EFP and field-based HD production and studio application. It supports most portable broadcast cameras and camcorders in heavy configuration and studio applications with teleprompter or compact studio lens.
- ◆ Quick-release mini Euro plate enables faster set-up of camera.



Camgear V25P EFP **GS CF Bowl 100MM** | Camgear V25P EFP **MS CF Bowl 100MM**

Tripod System incl. V25P Fluid Head, Carbon Fiber Tripod & Ground Spreader.

SKU: CMG-V25P-GS-CF-TRISYS

Tripod System incl. V25P EFP Fluid Head, Carbon Fiber Tripod & Mid Level Spreader.

SKU: CMG-V25P-MS-CF-TRISYS



System Configuration

V25P Fluid Head
EFP100/CF2 2-Stage Carbon Fiber Heavy-Duty EFP Tripod
2 PB-2 Telescopic Pan Bars (Left & Right)
GS-2 Ground Spreader
Tripod Bag

Weight	11.02 kg/24.3 lbs
Maximum Height	1.78 m/70.1 in
Minimum Height	0.73 m/28.7 in
Transport Length	0.96 m/37.8 in
Section	2 Stages

System Configuration

V25P Fluid Head
EFP100/CF2 2-Stage Carbon Fiber Heavy-Duty EFP Tripod
2 PB-2 Telescopic Pan Bars (Left & Right)
MSP-2 Mid Level Spreader
RF-1 Rubber Feet (x3)
Tripod Bag

Weight	11.46 kg/25.3 lbs
Maximum Height	1.73 m/68.1 in
Minimum Height	0.76 m/29.9 in
Transport Length	0.96 m/37.8 in
Section	2 Stages


Camgear V35P EFP **Payload 45kg Bowl 150mm**



Specifications

Model Number	V35P
Maximum Payload	45 kg/99 lbs
Counterbalance Range	0-42 kg/0-92.6 lbs (at C.O.G 125 mm)
Camera Platform Type	Mini Euro plate (Camgear WP-5)
Sliding Range	120 mm/4.72 in
Camera Plate	1/4", 3/8" screw
Counterbalance System	11 steps (1-8 & 3 Adjusting levers)
Pan & Tilt Drag	8 steps (1-8)
Pan & Tilt Range	Pan: 360° / Tilt: +90/-75°
Temperature Range	-40°C to +60°C / -40 to +140°F
Levelling Bubble	Illuminated Levelling Bubble
Weight	7.03 kg/16.1 lbs
Bowl Diameter	150 mm

- ◆ Selectable 8 steps pan & tilt drag including zero position offer operators silky smooth movement and precise motion tracking and a shake-free shot.
- ◆ Selectable 11 position counterbalance, thanks to newly featured 3 added position, it can do much finer adjustment for the cameras to reach the perfect balance.
- ◆ Equipped with assembly lock mechanism, which ensures safe set-up of equipment.
- ◆ Perfect solution for EFP and field-based HD production and studio application. It supports most portable broadcast cameras and camcorders in heavy configuration and studio applications with teleprompter or compact studio lens.
- ◆ Quick-release mini Euro plate enables faster set-up of camera.



Camgear V35P EFP **GS CF Bowl 150mm**

Tripod System incl. V35P Fluid Head, Carbon Fiber Tripod & Ground Spreader.

SKU: CMG-V35P-GS-CF-TRISYS



System Configuration

V35P Fluid Head
EFP150/CF2 2-Stage Carbon Fiber Heavy-Duty EFP Tripod
2 PB-2 Telescopic Pan Bars (Left & Right)
GS-2 Ground Spreader
Tripod Bag

Weight	12.8 kg/28.2 lbs
Maximum Height	1.83 m/72 in
Minimum Height	0.75 m/29.5 in
Transport Length	0.99 m/39 in
Section	2 Stages

Camgear V35P EFP **MS CF Bowl 150mm**

Tripod System incl. V35P EFP Fluid Head, Carbon Fiber Tripod & Mid Level Spreader.

SKU: CMG-V35P-MS-CF-TRISYS



System Configuration

V35P Fluid Head
EFP150/CF2 2-Stage Carbon Fiber Heavy-Duty EFP Tripod
2 PB-2 Telescopic Pan Bars (Left & Right)
MSP-2 Mid Level Spreader
RF-1 Rubber Feet (x3)
Tripod Bag

Weight	13.24 kg/29.2 lbs
Maximum Height	1.76 m/69.3 in
Minimum Height	0.79 m/31.1 in
Transport Length	0.99 m/39 in
Section	2 Stages



“ With ‘The Crew’ we work on shoots all over the world. On many locations and in different situations. In Australia I used the V35P and was actually quite happy with it. Eventhough sand and fluid heads are not a match made in heaven, the V35P was very stabile and did the job it was meant for!”

Ivo Borkus
thecrew.nl

Camgear CINE30 **Payload 45KG Bowl 150MM + Flat Base**



Specifications

Model Number	C30
Maximum Payload	45 kg/99.2 lbs
Counterbalance Range	0-45 kg/0-99.2 lbs (at C.O.G 125 mm)
Camera Platform Type	Sideload plate (Camgear CINE30)
Sliding Range	150 mm/5.9 in
Camera Plate	Double 3/8" screw
Counterbalance System	10+2 steps (1-10 & 2 Adjusting levers)
Pan & Tilt Drag	8 steps (1-8)
Pan & Tilt Range	Pan: 360° / Tilt: +90/-75°
Temperature Range	-40°C to +60°C / -40 to +140°F
Levelling Bubble	Illuminated Levelling Bubble
Weight	6.7 kg/14.7 lbs
Bowl Diameter	150 mm

- ◆ Real professional drag performance, selectable 8 positions pan & tilt drag including zero position.
- ◆ Selectable 10+2 counterbalance steps, equal to 18 position counterbalance plus boost button, suitable for Cine cameras and heavy ENG&EFP application.
- ◆ Extremely reliable and flexible solution for daily film and HD use.
- ◆ The Snap&Go side-loading mechanism gets heavy camera packages mounted quickly without compromising safety or sliding range, and is also compatible with Arri and OConner camera plates.
- ◆ Equipped with integrated flat base, easy switch between 150 mm and Mitchell flat base.
- ◆ A tilt safety lock guarantees the integrity of the payload until it is secured.

Camgear CINE30 CINE GS AL **Bowl 150MM + Flat Base**

Tripod System incl. CINE30 Fluid Head, Aluminum Tripod & Ground Spreader.
SKU: CMG-CINE30-GS-AL-TRISYS



System Configuration

- CINE30 Fluid Head
- CINE150/AL Cine Aluminum Tripod
- 2 PB-2 Telescopic Pan Bars (Left & Right)
- GS-3 Cine Aluminum Ground Spreader
- Travel Case for Cine30 Head
- Tripod Bag

Weight	19.7 kg/43.3 lbs
Maximum Height	2 m/78.7 in
Minimum Height	1.13 m/44.5 in
Section	Single Stage

Camgear CINE30 EFP GS CF **Bowl 150MM + Flat Base**

Tripod System incl. CINE30 Fluid Head, Carbon Fiber Tripod & Ground Spreader.
SKU: CMG-CINE30-GS-CF-TRISYS



System Configuration

- CINE30 Fluid Head
- EFP150/CF2 2-Stage Carbon Fiber Heavy-Duty EFP Tripod
- Two PB-2 Telescopic Pan Bars (Left & Right)
- GS-2 Ground Spreader
- Travel Case for Cine30 Head
- Tripod Bag

Weight	13.44 kg/29.63 lbs
Maximum Height	1.84 m/72.4 in
Minimum Height	0.78 m/30.7 in
Section	2 Stages

Camgear CINE30 EFP MS CF **Bowl 150MM + Flat Base**

Tripod System incl. CINE30 EFP Fluid Head, Carbon Fiber Tripod & Mid Level Spreader.
SKU: CMG-CINE30-MS-CF-TRISYS



System Configuration

- CINE30 Fluid Head
- EFP150/CF2 2-Stage Carbon Fiber Heavy-Duty EFP Tripod
- 2 PB-2 Telescopic Pan Bars (Left & Right)
- MSP-2 Mid Level Spreader
- RF-1 Rubber Feet (x3)
- Travel Case for Cine30 Head
- Tripod Bag

Weight	13 kg/28.6 lbs
Maximum Height	1.78 m/70.1 in
Minimum Height	0.81 m/31.9 in
Section	2 Stages

Camgear V60 Studio/OB

Payload 60KG

4-Bolt Flat Base



Specifications

Model Number	V60 Studio/OB
Maximum Payload	60 kg/132 lbs
Camera Platform Type	V-Plate
Sliding Range	180 mm/7.1 in
Camera Plate	Double 3/8" screw
Counterbalance System	15 steps (1-10 & 5 Adjusting levers)
Pan & Tilt Drag	10 steps (1-10)
Pan & Tilt Range	Pan: 360° / Tilt: +90/-75°
Temperature Range	-40°C to +60°C / -40 to +140°F
Levelling Bubble	Illuminated Levelling Bubble
Weight	15.52 kg/34.2 lbs
Tripod Fitting	4-Bolt Flat Base

- ◆ Selectable 10 positions pan & tilt drag including zero position, offer operators silky smooth movement, precise motion tracking and shake-free shot.
- ◆ Selectable 10 position counterbalance dial wheel plus center-added 5 more position, thanks to 10+5 counterbalance position system, it can do much finer adjustment for the camera to reach the perfect counterbalance.
- ◆ Perfect solution for various OB and studio applications.
- ◆ Its balance plate has a sliding range of up to 180 mm/7.1 in, allowing you to safely balance the camera at any tilt angle.
- ◆ It has easy-identified, direct-response and vibration-free pan and tilt brakes.
- ◆ Equipped with assembly lock mechanism, which ensures safe set-up of equipment.

Camgear V60 Studio/OB MS AL 4-Bolt Flat Base

Tripod System incl. V60S Fluid Head, Aluminum Tripod & Mid Level Spreader.

SKU: CMG-V60STOB-MS-AL-TRISYS



System Configuration

V60 Studio/OB Fluid Head
 Camgear Studio/OB Heavy-Duty Tripod
 2 PB-3 Telescopic Pan Bars (Left & Right)
 MSP-3 Heavy-Duty Mid Level Spreader

Payload Range	0-60 kg/0-132 lbs
Weight	31.68 kg/69.8 lbs
Maximum Height	1.61 m/63.4 in
Minimum Height	1.03 m/40.6 in

Camgear V60S EFP


Payload 70kg
4-Bolt Flat Base



Specifications

Model Number	V60S EFP
Maximum Payload	70 kg/154.3 lbs
Counterbalance Range	0-70 kg/0-154.3 lbs (at C.O.G 125 mm)
Camera Platform Type	Euro plate (Camgear WP-6)
Sliding Range	120 mm/4.7 in
Camera Plate	Double 3/8" screw
Counterbalance System	13 steps (1-10 & 3 Adjusting levers)
Pan & Tilt Drag	10 steps (1-10)
Pan & Tilt Range	Pan: 360° / Tilt: +90/-75°
Temperature Range	-40°C to +60°C / -40 to +140°F
Levelling Bubble	Illuminated Levelling Bubble
Weight	12.66 kg/27.9 lbs
Tripod Fitting	4-Bolt Flat Base

- ◆ Selectable 10 positions pan & tilt drag including zero position, offer operators silky smooth movement, precise motion tracking and shake-free shot.
- ◆ Selectable 10 position counterbalance dial wheel plus center-added 3 more position, thanks to 10+3 counterbalance position system, it can do much finer adjustment for the camera to reach the perfect counterbalance.
- ◆ Perfect solution for various heavy EFP applications.
- ◆ Equipped with Euro plate quick-release system, which enables faster set-up of camera. It also has sliding knob to allow easy adjustment of the horizontal balance of camera.
- ◆ Equipped with assembly lock mechanism, which ensures safe set-up of equipment.



Camgear V60S EFP MS AL 4-Bolt Flat Base

Tripod System incl. V60S EFP Fluid Head, Aluminum Tripod & Mid Level Spreader.

SKU: CMG-V60S-EFP-MS-AL-TRISYS



System Configuration

V60S EFP Fluid Head
Camgear Studio/OB Heavy-Duty Tripod
2 PB-3 Telescopic Pan Bars (Left & Right)
MSP-3 Heavy-Duty Mid Level Spreader

Weight	28.82 kg/63.5 lbs
Maximum Height	1.61 m/63.4 in
Minimum Height	1.03 m/40.6 in
Section	1 Stage

Camgear V90 Studio/OB

Payload 90KG

4-Bolt Flat Base



Specifications

Model Number	V90 Studio/OB
Maximum Payload	90 kg/198 lbs
Camera Platform Type	V-Plate
Sliding Range	180 mm/7.1 in
Camera Plate	Double 3/8" screw
Counterbalance System	18 steps (1-10 & 8 Adjusting levers)
Pan & Tilt Drag	10 steps (1-10)
Pan & Tilt Range	Pan: 360° / Tilt: +90/-75°
Temperature Range	-40°C to +60°C / -40 to +140°F
Levelling Bubble	Illuminated Levelling Bubble
Weight	17.28 kg/38.1 lbs
Tripod Fitting	4-Bolt Flat Base

- ◆ Selectable 10 positions pan & tilt drag including zero position, offer operators silky smooth movement, precise motion tracking and a shake-free shot.
- ◆ Selectable 10 position counterbalance dial wheel plus center-added 8 more position support cameras or any weight between 0-90 kg/0-198 lbs. Thanks to 10+8 counterbalance position system, it can do much finer adjustment for the cameras to reach the perfect counterbalance.
- ◆ Perfect solution for various OB and studio applications.
- ◆ Its balance plate has a sliding range of up to 180 mm/ 7.1 in, allowing you to safely balance the camera at any tilt angle.
- ◆ It has easy-identified, direct-response and vibration-free pan and tilt brakes.
- ◆ Equipped with assembly lock mechanism, which ensures safe set-up of equipment.

Camgear V90 Studio/OB MS AL 4-Bolt Flat Base

Tripod System incl. V90S Fluid Head, Aluminum Tripod & Mid Level Spreader.

SKU: CMG-V90STOB-MS-AL-TRISYS



System Configuration

V90 Studio/OB Fluid Head
 Camgear Studio/OB Heavy-Duty Tripod
 Two PB-3 Telescopic Pan Bars (Left & Right)
 MSP-3 Heavy-Duty Mid Level Spreader

Payload Range	0-90 kg/0-198 lbs
Weight	33.44 kg/73.7 lbs
Maximum Height	1.61 m/63.4 in
Minimum Height	1.03 m/40.6 in

Accessories

Ground Spreaders

Ground Spreader GS-2

For DV6P, V10, V12, V15P, V20P, V25P & V35P Tripod Systems

SKU: CMG-GROUNDSPDR-2



Payload
60 kg/132.2 lbs

Weight
0.82 kg/1.83 lbs

Build-up radius
35-60 cm/13-22.8 in

Cine Ground Spreader GS-3

For CINE30 & OB/Studio Tripod Systems

SKU: CMG-GROUNDSPDR-3



Payload
140 kg/308 lbs

Weight
1.9 kg/4.2 lbs

Build-up radius
39-58 cm/15.4-22.8 in

Heavy-Duty Ground Spreader GS-4

For EFP, CINE30 & OB/Studio Tripod Systems

SKU: CMG-GROUNDSPDR-4



Payload
140 kg/308 lbs

Weight
1.78 kg/3.9 lbs

Build-up radius
35-58 cm/13.8-22.8 in

Dollies

Dolly S

For MARK 4, MARK 6, DV6P & V10 Tripod Systems

SKU: CMG-DOLLY-S



Payload
35 kg/77.2 lbs

Weight
3.32 kg/7.3 lbs

Dimensions
H: 19 cm/H: 7.5 in

Build-up radius
51 cm/20 in

Dolly L

For DV6P, V10, V12, V15P, V20P, V25P & V35P Tripod Systems

SKU: CMG-DOLLY-L



Payload
100 kg/220 lbs

Weight
4.94 kg/10.9 lbs

Dimensions
H: 19 cm/H: 7.5 in

Build-up radius
51 cm/20 in

Dolly XL

For V60S EFP, V60 Studio/OB & V90 Studio/OB Tripod Systems

SKU: CMG-DOLLY-XL



Payload
150 kg/330.7 lbs

Weight
14 kg/30.86 lbs

Dimensions
H: 19 cm/H: 7.5 in

Build-up radius
51 cm/20 in

Mid Level Spreaders & Rubber Feet

Mid Level Spreader MSP-2

For all Camgear Tripod Systems

SKU: CMG-MIDSPREADER-2



Weight
0.95 kg/2.1 lbs

Rubber Feet RF-1 (set of 3)

Black Oval Shaped Feet. Required with Mid Level Spreader MSP-2. For DV6P, V10, V12, V15P, V20S, V20P, V25P, V35P Tripod Systems.

SKU: CMG-RUBBERFEET-1



Weight
0.30 kg/0.66 lbs

Rubber Feet RF-2 (set of 3)

Red Round Feet. Required with Mid Level Spreader MSP-2. For DV6P, V10, V12, V15P, V20S, V20P, V25P, V35P Tripod Systems.

SKU: CMG-RUBBERFEET-2



Weight
0.45 kg/0.99 lbs

Pan Bars

Pan Bar PB-1

For DV6P, V10, V12 & V15P Tripod Systems

SKU: CMG-PANBAR-1



Weight
0.3 kg/0.66 lbs

Dimensions
42.5 cm/1.67 in

Telescopic Pan Bar PB-2 (set of 2)

For V20P, V25P & V35P Tripod Systems

SKU: CMG-TELE-PANBAR-2



Weight
0.88 kg/1.94 lbs

Dimensions
35-58 cm/13.7-22.8 in

Telescopic Pan Bar PB-3 (set of 2)

For V60S EFP, V60 Studio/OB & V90 Studio/OB Tripod Systems

SKU: CMG-TELE-PANBAR-3



Weight
1.46 kg/1.67 lbs

Dimensions
Front Section: 385 mm/15.16 in
Back Section: 365 mm/14.4 in

Telescopic Pan Bar PB-4 (set of 2)

For DV6P, V10, V12 & V15P Tripod Systems

SKU: CMG-TELE-PANBAR-4



Weight
0.85 kg/1.9 lbs

Dimensions
35-58 cm/13.8-22.8 in

Wedge Plates & V-Plates

Wedge Plate WP-1

For V10 Fluid Heads

SKU: CMG-WEDGEPLATE-WP1



Weight
119 g/0.26 lbs

Dimensions
8.2 x 5.4 cm/3.2 x 2.1 in

Wedge Plate WP-2

For DV6P Fluid Heads

SKU: CMG-WEDGEPLATE-WP2



Weight
74 g/0.16 lbs

Dimensions
8.2 x 5.4 cm/3.2 x 2.1 in

Wedge Plate WP-3

For V12, V15P & V20S Fluid Heads

SKU: CMG-WEDGEPLATE-WP3



Weight
80 g/0.18 lbs

Dimensions
8.2 x 5.4 cm/3.2 x 2.1 in

Wedge Plate WP-4

For V20P & V25P EFP Fluid Heads

SKU: CMG-WEDGEPLATE-WP4



Weight
90 g/0.2 lbs

Dimensions
10.2 x 6.4 cm/4 x 2.5 in

Wedge Plate WP-5

For V35P Fluid Heads

SKU: CMG-WEDGEPLATE-WP5



Weight
131 g/0.2 lbs

Dimensions
10.2 x 7.4 cm/4 x 2.9 in

Wedge Plate WP-6

For V60S EFP Fluid Heads

SKU: CMG-WEDGEPLATE-WP6



Weight
190 g/0.41 lbs

Dimensions
12 x 8 cm/4.7 x 3.1 in

V-Plate

For V60 Studio/OB & V90 Studio/OB Fluid Heads

SKU: CMG-VPLATE



Weight
860 g/1.9 lbs

Dimensions
Width: 256 mm/10.1 in Length: 66 & 156 mm/2.6 & 6.1 in

CINE30 Plate

For CINE30 CINE/EFP/ENG Fluid Head

SKU: CMG-CINE30PLATE



Weight
440 g/0.97 lbs

Dimensions
96 x 305 mm/3.8 x 12 in

Adapter plates

Tripod Adapter TA-2

V-mount tripod plate with quick-release mechanism

SKU: CMG-TRIPODADAPT-2



Weight
840 g/1.85 lbs

Dimensions
285 x 30 x 80 mm/11 x 1.2 x 3.1 in

- ◆ The Tripod Adapter plate TA-2 allows professional broadcast cameras to be attached to any VCT-14 style tripod (wedge plate).
- ◆ Universal V-mount quick-release system allowing for rapid transition from shoulder mounted and tripod shooting.
- ◆ It features a red safety lever and a black lock lever to minimize the chance of accidental dismounting of the camera.
- ◆ Compatible with all V-mount plates with quick-release system.
- ◆ Suited for all professional broadcast cameras with a V-mount mechanism.
- ◆ Multiple mounting locations to provide perfect balance.

Bowl Clamps & Mitchell Adapters

Bowl Clamp BC-1

Low Profile Bowl Clamp for all 75mm & 100mm Heads

SKU: CMG-BOWLCLAMP-1



Weight
130 g/0.28 lbs

Bowl Clamp BC-2

For DV6P, V10, V12, V15P, V20S, V20P & V25P Tripod Systems

SKU: CMG-BOWLCLAMP-2



Weight
120 g/0.26 lbs

Bowl Clamp BC-3

For V35P Tripod Systems

SKU: CMG-BOWLCLAMP-3



Weight
200 g/0.44 lbs

Mitchell Adapter and Locking Knob

For V60S EFP, V60 Studio/OB & V90 Studio/OB Tripod Systems

SKU: CMG-MITCH-ADAPT



Weight
1080 g/2.38 lbs

Hard Cases

Travelling Case CINE30

For CINE30 Fluid Heads

SKU: CMG-TRAVELCASE-CINE30



Weight
6.2 kg/13.67 lbs

Dimensions
35 x 30 x 43 cm/13.8 x 11.8 x 16.9 in

Travelling Case V60/V90

For V60S EFP, V60 Studio/OB & V90 Studio/OB Fluid Heads

SKU: CMG-TRAVELCASE-V60-90



Weight
6.06 kg/13.4 lbs

Dimensions
46.5 x 42.5 x 35.5 cm/18.3 x 16.7 x 14 in

Travelling Case Tripod 100/150

For V20P EFP/V25P EFP/V35P EFP/CINE150 AL GS Long Tripod

SKU: CMG-TRAVELCASE-100-150



Diameter
30 cm/11.8 in

Length
105 cm/41.3 in

Weight
6.7 kg/14.77 lbs

Recommended Products

camRade tripodBag Lite

For DV6P/V10 Tripod Systems

SKU: CAM-TRIPB-LITE



Outside dimensions
89 x 17 x 19 cm/35.0 x 6.7 x 7.5 in

Weight
1.20 kg/2.65 lbs

- ◆ Flexible yet thick padded construction with water-resistant 1000 denier Cordura® exterior and high quality YKK® zippers
- ◆ Straps and soft velour padding for stabilizing tripod inside bag
- ◆ Padded suede shoulder strap and 2 suede handles

CAMRADE
www.camrade.com

camRade tripodBag Traveler

For DV6P/V10/V12/V15P/V20P EFP/V20S Tripod Systems

SKU: CAM-TRIPB-TRAVELER



Outside dimensions (including wheels)
104 x 25 x 23 cm/40.9 x 9.8 x 9.1 in

Weight
4.85 kg/10.69 lbs

- ◆ Reinforced construction with water-resistant 1000 denier Cordura® exterior and high quality YKK® zippers and soft padded interior
- ◆ Easy transportation due to wheels on the bag
- ◆ 2 Bumpers to customize layout of inside bag and 4 pockets with zippers

CAMRADE
www.camrade.com

camRade tripodBag heavyDuty

For V25P EFP/V35P EFP Tripod Systems & CINE30 EFP (legs only)

SKU: CAM-TRIPB-HD



Outside dimensions (including wheels)
116 x 30 x 27 cm/45.7 x 11.8 x 10.6 in

Weight
6.80 kg/14.99 lbs

- ◆ Reinforced construction with water-resistant 1000 denier Cordura® exterior and high quality YKK® zippers and soft padded interior
- ◆ Easy transportation due to wheels on the bag
- ◆ 2 Bumpers to customize layout of inside bag and various pockets with zippers for storage of accessories

CAMRADE
www.camrade.com

Inside dimensions (without bumpers)
108 x 25 x 25 cm/42.5 x 9.8 x 9.8 in

YOUR LOCAL RESELLER:



www.camgear-pro.com

This catalog has been compiled with the greatest possible care. However, mistakes or changes in models, designs, specifications, visuals or any other information are under reserve. No rights can be derived in any way from the content of this catalog. Technical additions or errors do not constitute grounds for compensation claims.